

WIN-Slide 2

SLIDING SYSTEM for shutters weighing up to 80 kg



GUARANTEE
12 YEARS
SYSTEMS FOR
OUTDOOR USE



SLIDING

WIN-Slide 2 high-end sliding systems

■ COMPACT:


- reduced vertical space requirements across the range, with 3-directional adjustment maintained. The brackets have diagonal oblong holes for more stability
- new compact pelmet - return pulley integrated into the end stop

- TIME-SAVING: spacing between track fastening points increased by 50% (from 44 to 66 cm)

- SAFETY: new end stop with 2 anchoring points in the track

- INNOVATION: new damper ensuring panels open and close softly.

The new hanger rollers increase the surface area of the panel exposed to wind

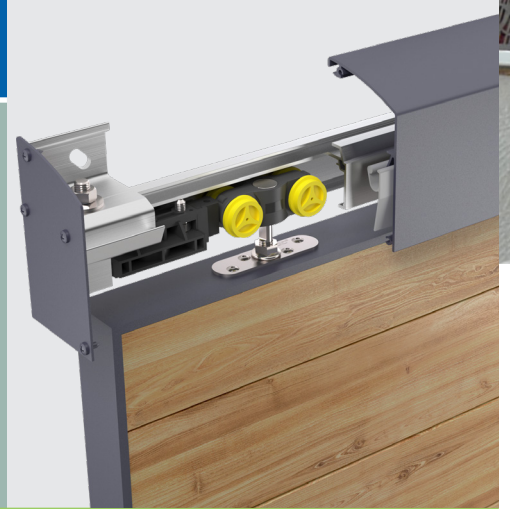

DESIGNER AND MANUFACTURER OF SLIDING SYSTEMS SINCE 1920

www.mantion.com

MANTION
SLIDING SYSTEMS



WIN-Slide 2 for panels up to 80 kg

HANGERS & ACCESSORIES

Reference	Description
11280XA2	Hanger equipped with 4 rollers, pins mounted on ball bearings, A2 stainless steel M8 screw. For panels operated manually, without synchronisation – max. weight 80 kg/panel.
11280LXA2	Ditto for synchronised and/or motorised panels
0026XA2	A2 stainless steel plate to be screwed on edge. Panel thickness: 25 mm min.
0027XA2	A2 stainless steel bracket to be screwed on panel face (80 x 58 mm). Panel thickness: 28 to 36 mm.
11286XA2	Track stop with two anchoring points. Supplied with A2 stainless steel fasteners.



SOFTCLOSER

JUNE 2023	Softcloser for softly opening and/or closing doors. The softcloser automatically accompanies the panel to its open and/or closed position.
------------------	--

TRACKS & ACCESSORIES – SINGLE TRACK – 80 KG

11208/600	Raw aluminium track, 39 x 36 mm cross-section. L = 6 m.
11293	Adjustable, single, raw aluminium mounting bracket. Supplied with A2 stainless steel fasteners. Fastened every 660 mm at most.



PELMETS & END CAPS – SINGLE TRACK – 80 KG

For manually operated shutters

11263/600	Raw aluminium pelmet. L = 6 m.
11266	Set of pelmet end caps 11263, including: 2 raw aluminium end caps, 2 pelmet fastening clamps, 8 A2 stainless steel 3.9 x 19 screws



For synchronised and/or motorised shutters

11263L/600	Raw aluminium pelmet. L = 6 m.
11266L	Set of pelmet end caps 11263L, for synchronised shutters, including: 2 raw aluminium end caps, 2 pelmet fastening clamps, 8 A2 stainless steel 3.9 x 19 screws.
11266M	Ditto for motorised shutters; contains an extra bracket for the end cap on the motor side.



Pelmet mounting

11269	5 anodised aluminium clamps. To fasten pelmets to brackets.
--------------	---

TRACKS & ACCESSORIES – dual track or single shade screen – 80 kg


11208/600	Raw aluminium track, 39 x 36 mm cross-section. L = 6 m.
11293D	Adjustable, double, raw aluminium mounting bracket. Supplied with A2 stainless steel fasteners. Fastened every 660 mm at most.



PELMETS & END CAPS – dual track or single shade screen – 80 kg

For synchronised and/or motorised shutters

11264L/600	Raw aluminium pelmet. Length = 6 m.
11267L	Set of pelmet end caps 11264L, for synchronised shutters, including: 2 raw aluminium end caps, 2 pelmet fastening clamps, 8 A2 stainless steel 3.9 x 19 screws.
11267M	Ditto for motorised shutters; contains an extra bracket for the end cap on the motor side.

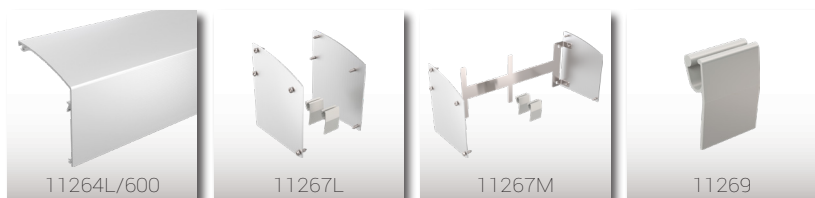

Pelmet mounting

11269	5 anodised aluminium clamps. To fasten pelmets to brackets.
--------------	---

