



## Premium sliding system **SAF<sup>®</sup>** **WITH WOODEN PELMET**



**Simple, reliable and quick to install!**

■ **SILENT:**

Rollers mounted on ball bearings

■ **AESTHETICS:**

White coated MDF pelmet and door jamb, ready to paint


■ **PRACTICAL:**

One-piece angle track > simplified mounting

Wooden pelmet > easy to install using clips

One-piece angle track  
with wooden pelmet &  
door jamb





## SET SAF®WOOD 60


Item no.	Description
<b>SAFB60-185</b>	Set <b>SAF BOIS</b> for 1 door weighing up to <b>60 Kg</b> :
	- 1 raw aluminium track drilled, length of <b>1.85 m</b> .
	- 1 White coated MDF door jamb with a white seal
	- 2 white-coated MDF sticks
	- 1 white coated MDF pelmet (can be recut)
	- 3 fastening brackets for pelmet
	- 2 rollers <b>13218</b> + 2 plates <b>13036</b>
	- 2 adjustable end stops <b>11213</b>
	- 1 floor guide <b>1103R</b>
	- Spanner, screws and assembly instructions

**60  
KG**


## SECOND SOFT-CLOSER OPTION

<b>M65S</b>	Softcloser for gentle closing of doors (100 mm). Softcloser automatically follows door to its closed position.. Suitable for doors weighing <b>10 - 20 KG</b> . It is recommended that 2 softclosers be used for doors with a width of 850 mm or more.
<b>M66S</b>	Ditto for doors weighing <b>21 à 60 KG</b> .

Conditions for 2 soft-closers **M65S** or **M66S**

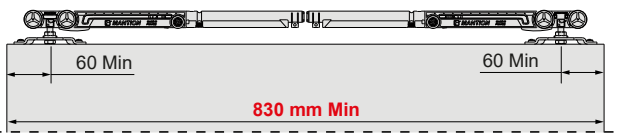

## SET SAF®BOIS

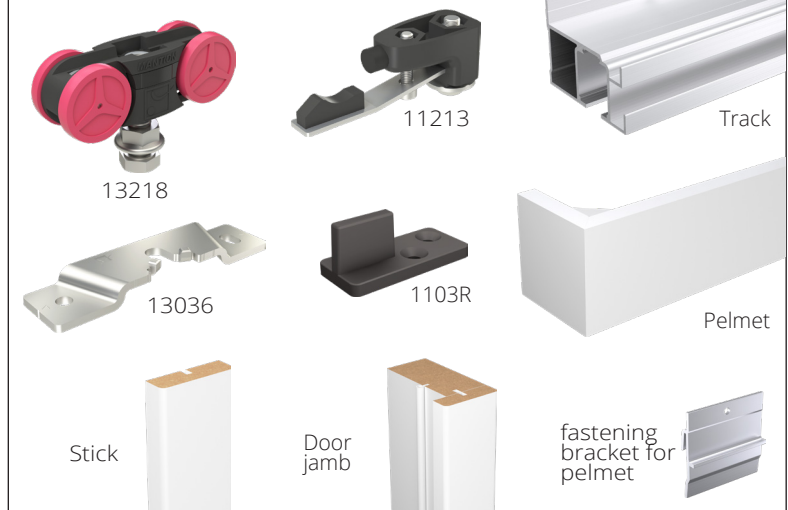

For the best operating results, choose a softcloser adapted to the dead load of your door:

Innovation MANTION :  
Damper for lightweight doors

